

# Shop Supplies & Equipment for Lifting, Moving, Parking, & More!

**DYNALINE**

## Hydraulic Bottle Jack



- Drop-forged alloy-steel construction with red powder-coated finish
- Serrated heat-treated saddle with adjustable screw-top extension
- Built-in safety valve
- Meets ASME 2014 safety standards
- For residential and commercial lifting

| Part # | Lifting Capacity     | Lifting Range                                 |
|--------|----------------------|-----------------------------------------------|
| 11551  | 2-ton<br>(4,000 lb)  | 6-7/32" to<br>12-1/8" (158<br>mm – 308<br>mm) |
| 11552  | 4-ton<br>(8,000 lb)  | 7-3/32" to<br>13-3/4" (180<br>mm – 350<br>mm) |
| 11553  | 6-ton<br>(12,000 lb) | 7-3/4" to<br>15-3/64" (197<br>mm – 382<br>mm) |

## 11557 Scissor Jack



- 2-ton (4,000 lb) capacity
- Lifting range: 4-1/8" to 15-3/8" (105 mm – 390 mm)
- Collapsible steel scissor jack with saddle-top design
- Red powder-coated finish
- Meets ASME 2014 safety standards

## 11556 Pneumatic/Hydraulic Bottle Jack




- 20-ton (40,000 lb) lifting capacity
- Lifting range: 10-7/32" to 20-3/32" (260 mm – 510 mm)
- Manual or air operation
- 100–120 PSI air pressure rating
- Drop-forged alloy-steel construction with red powder-coated finish
- Serrated heat-treated saddle with adjustable screw-top extension
- Air valve with integrated filter and sealed hydraulic unit
- Meets ASME 2014 safety standards
- For heavy commercial use

## 11558 Hydraulic Floor Jack



- 2-ton (4,000 lb) capacity
- Safety overload system prevents use beyond rated capacity
- Lifting range: 5-5/16" to 13-3/16" (135 mm – 335 mm)
- Two large steel wheels and two 360° swivel casters for mobility
- Rotating heavy-duty saddle
- Built-in carrying handle
- Meets ASME 2014 safety standards
- For automotive and industrial lifting

## 11559 Low Profile Hydraulic Jack



- 3-ton (6,000 lb) capacity
- Low-profile design for low-clearance vehicles and tight spaces
- Safety overload system prevents use beyond rated capacity
- Lifting range: 2-15/16" to 19-11/16" (75 mm – 500 mm)
- Dual-piston quick-lift pump
- Two large steel wheels and two 360° swivel casters for mobility
- Rotating heavy-duty saddle with foam bumper on handle
- Meets ASME 2014 safety standards

## 11570 Jack Stand



- 3-ton (6,000 lb) capacity per stand
- Lifting range: 10-7/16" to 16-3/4" (265 mm – 426 mm)
- Double-lock protection feature for added safety
- Single-piece, self-locking, multi-position forged-iron ratchet bar
- Large saddle surface area
- Heavy-duty steel construction with red powder-coated finish
- Meets ASME 2014 safety standards
- Sold 2 per box

### 11573 Utility Farm Jack



- 8,000 lb capacity
- Lifting range: 5-1/8" to 40" (130 mm – 1015 mm)
- For off-road and utility applications
- For lifting, pulling, clamping, winching, and spreading
- Multi-directional design for vertical and horizontal use
- Fast-lifting mechanism and wide base for added stability
- Heavy-duty steel construction with red powder-coated finish and zinc-plated hardware
- Meets ASME B30.1 safety standards
- Maintenance kit (11574) available

### Low Profile Vehicle Ramp


- For vehicles with limited clearance
- High-impact plastic construction — rust-proof and durable
- Sold 2 per box



| Part # | Lift Height | Dimensions                 | Incline Angle | Capacity          | Gross Vehicle Weight |
|--------|-------------|----------------------------|---------------|-------------------|----------------------|
| 11380  | 2.5"        | 27.5" L x 8" W<br>x 3.1" H | 9°            | 5,000 lb/<br>ramp | 20,000 lb            |

### Stackable Vehicle Ramp

- Curved cradle platform keeps wheels in position
- Non-skid tread pattern increases traction and reduces shifting
- High-impact plastic construction — rust-proof and durable
- Sold 2 per box

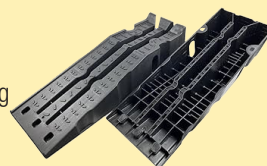

| Part # | Lift Height | Dimensions                  | Incline Angle | Capacity          | Gross Vehicle Weight |
|--------|-------------|-----------------------------|---------------|-------------------|----------------------|
| 11381  | 6.1"        | 35.6" L x 13" W<br>x 8.5" H | 17°           | 4,000 lb/<br>ramp | 20,000 lb            |

### Garage Parking Stops




- Peel-and-stick installation with Styrofoam film backing — no drilling required
- Made of environmentally friendly material
- Highly visible yellow safety stripes

| Part # | Lifting Capacity        |
|--------|-------------------------|
| 11386  | 18" L x 3.5" W x 1.3" H |
| 11387  | 18" L x 3.8" W x 1.8" H |

### Detachable Vehicle Ramp

- Detachable incline section for added working space or jack placement
- High-impact plastic construction — rust-proof and durable
- 6 rubber pads per section for maximum grip
- Sold 2 per box

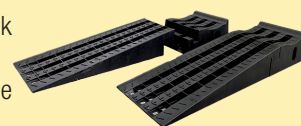

| Part # | Lift Height | Dimensions                  | Incline Angle | Capacity          | Gross Vehicle Weight |
|--------|-------------|-----------------------------|---------------|-------------------|----------------------|
| 11382  | 6.3"        | 52.6" L x 15" W<br>x 8.3" H | 9.5°          | 3,250 lb/<br>ramp | 13,000 lb            |

### 11575 Convertible Mechanic Creeper/Stool

- 300 lb capacity, 36" length
- Converts easily from creeper to seated stool
- Sturdy iron-pipe frame with powder-coated finish
- Thick padded vinyl cushions with waterproof and oil-proof surface
- Six 2.5" 360° ball-bearing polypropylene casters
- Red body with black frame



### 11395 Convertible Hand Truck



- 660 lb capacity
- Steel construction
- Large 14" x 8" platform
- Black finish with silver finish handle
- Converts for vertical or horizontal use
- Two 10" solid rubber flat-free wheels
- Two 5" swivel casters for easy mobility
- Adjustable flow-back handle allows one-handed operation

## Retractable Hose Reel - Silver Series



- Industrial grade hose for water, oil, and air
- Rated to 300 psi
- Heavy-duty auto-rewind design
- Powder-coated steel assembly
- Self-locking mechanism with heavy-duty springs
- Solid brass swivel
- Mounts on floor, wall, or workbench
- Robust enough for commercial use
- Replacement parts available (11359-3, 11359-4, 11360-1, 11369-1)

| Part # | Hose Length | Hose Diameter |
|--------|-------------|---------------|
| 11360  | 50 ft.      | 3/8"          |
| 11361  | 50 ft.      | 1/2"          |


## Industrial Hose Reel



- Heavy-duty industrial-grade rubber hose for air and water
- Rated to 300 psi
- Ratchet gear locks the reel at the desired hose length
- 3/8" NPT brass fitting
- Red baked-enamel painted finish for corrosion resistance
- Replacement parts available (11369-1, 11369-2, 11369-3, 11369-4)

| Part # | Hose Length | Hose Diameter | Colour         |
|--------|-------------|---------------|----------------|
| 11369  | 50 ft.      | 3/8"          | Red            |
| 11371  | 100 ft.     | 3/8"          | Black & Yellow |

## Air Hose Reels - Heavy Duty Steel Frame

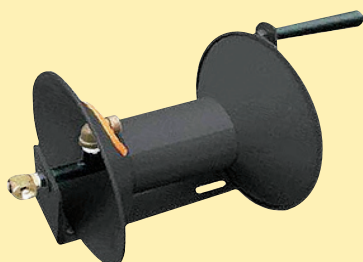

- Black baked-enamel painted finish for corrosion resistance
- Spring tension brake and solid brass swivel
- Mounts on floor, wall, ceiling, or workbench
- Accepts 3/8" hose with 3/8" NPT inlet and outlet
- Replacement swivel (11362-1) available
- Hose not included

| Part # | Reel Capacity |
|--------|---------------|
| 11362  | 100 ft.       |
| 11363  | 50 ft.        |

## 11389 Tire Racking Dolly

- Easy to assemble 4-level design stores and moves up to four tires
- 55 lb capacity per level; 220 lb total capacity
- Sturdy iron-pipe frame with powder-coated finish
- Heavy-duty steel construction
- Rim-protecting supports eliminate tire distortion from loss of pressure
- Accommodates tires up to 8.8" wide
- Four 2" non-marring thermoplastic-rubber swivel casters
- One caster includes a locking brake



## 11390 Wall Mounting Folding Tire Rack



- 300 lb capacity
- Adjustable width from 32" to 48"
- Dimensions: 22" L x 20" H
- Heavy-duty steel construction with red finish
- Easily accommodates four standard tires

## 51395 Shop Towels



- Bundle of 6 red cotton shop towels
- Each towel measures 13" x 14"
- For workshop and garage environments